



APPENDIX 6. LOCATION OF LIGHTS ON OBSTACLES

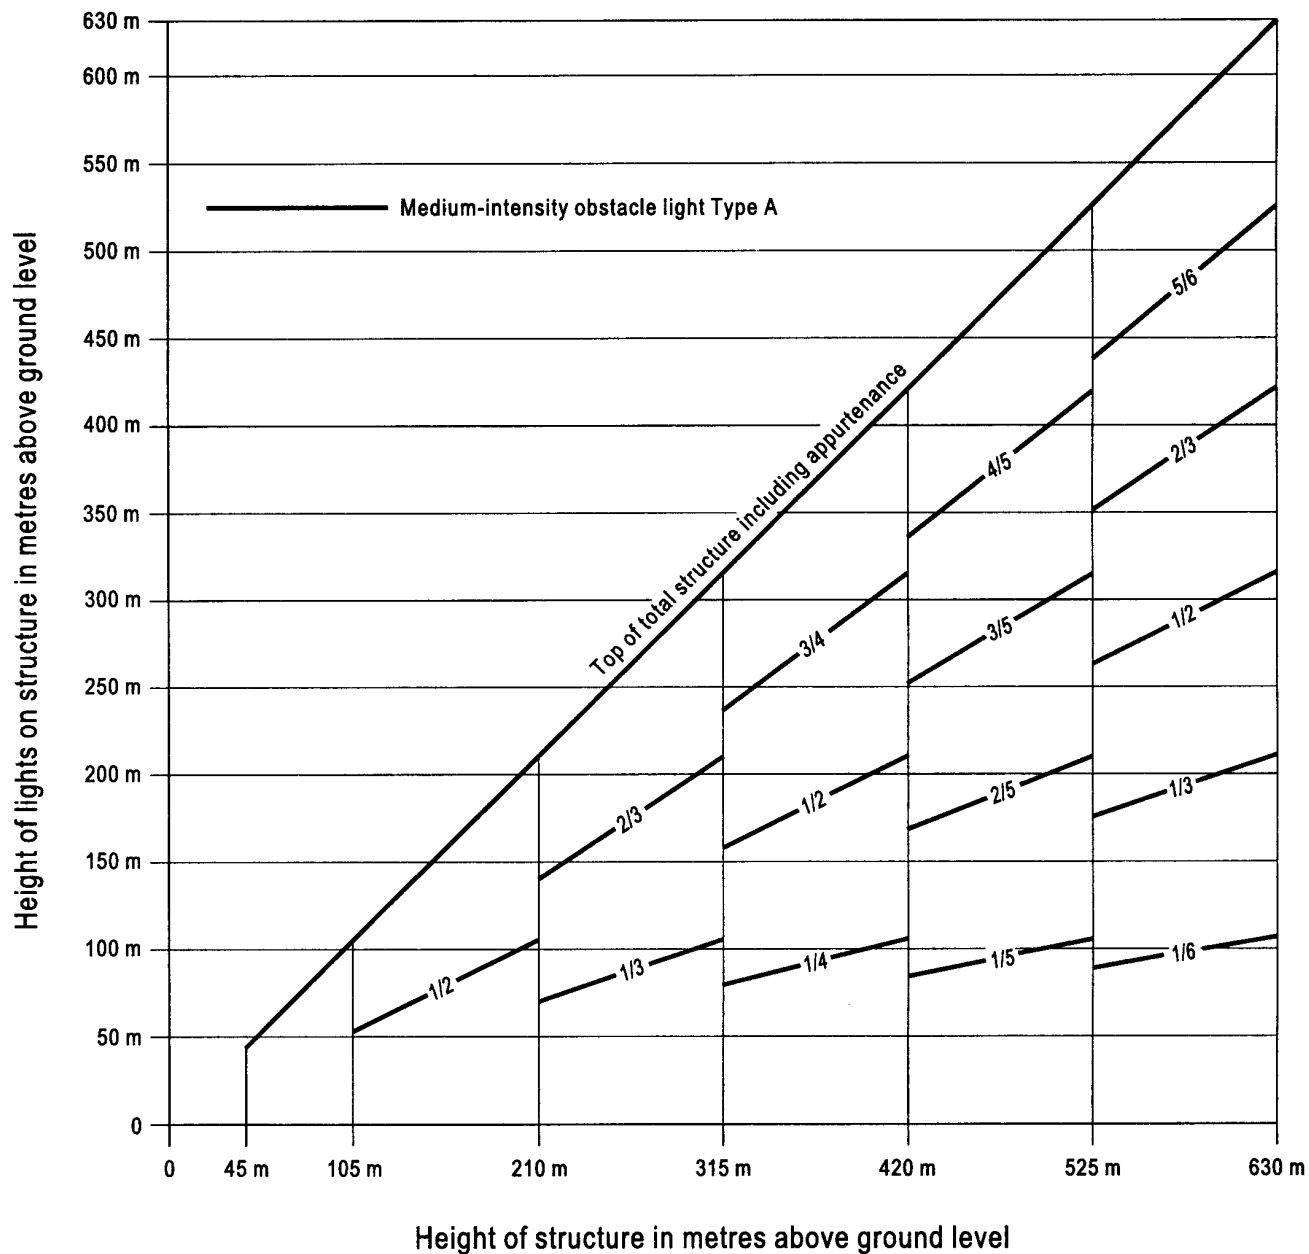

Note.— High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level. If medium-intensity lighting is used, marking will also be required.

Figure 6.1 Medium-intensity flashing-white obstacle lighting system, Type A

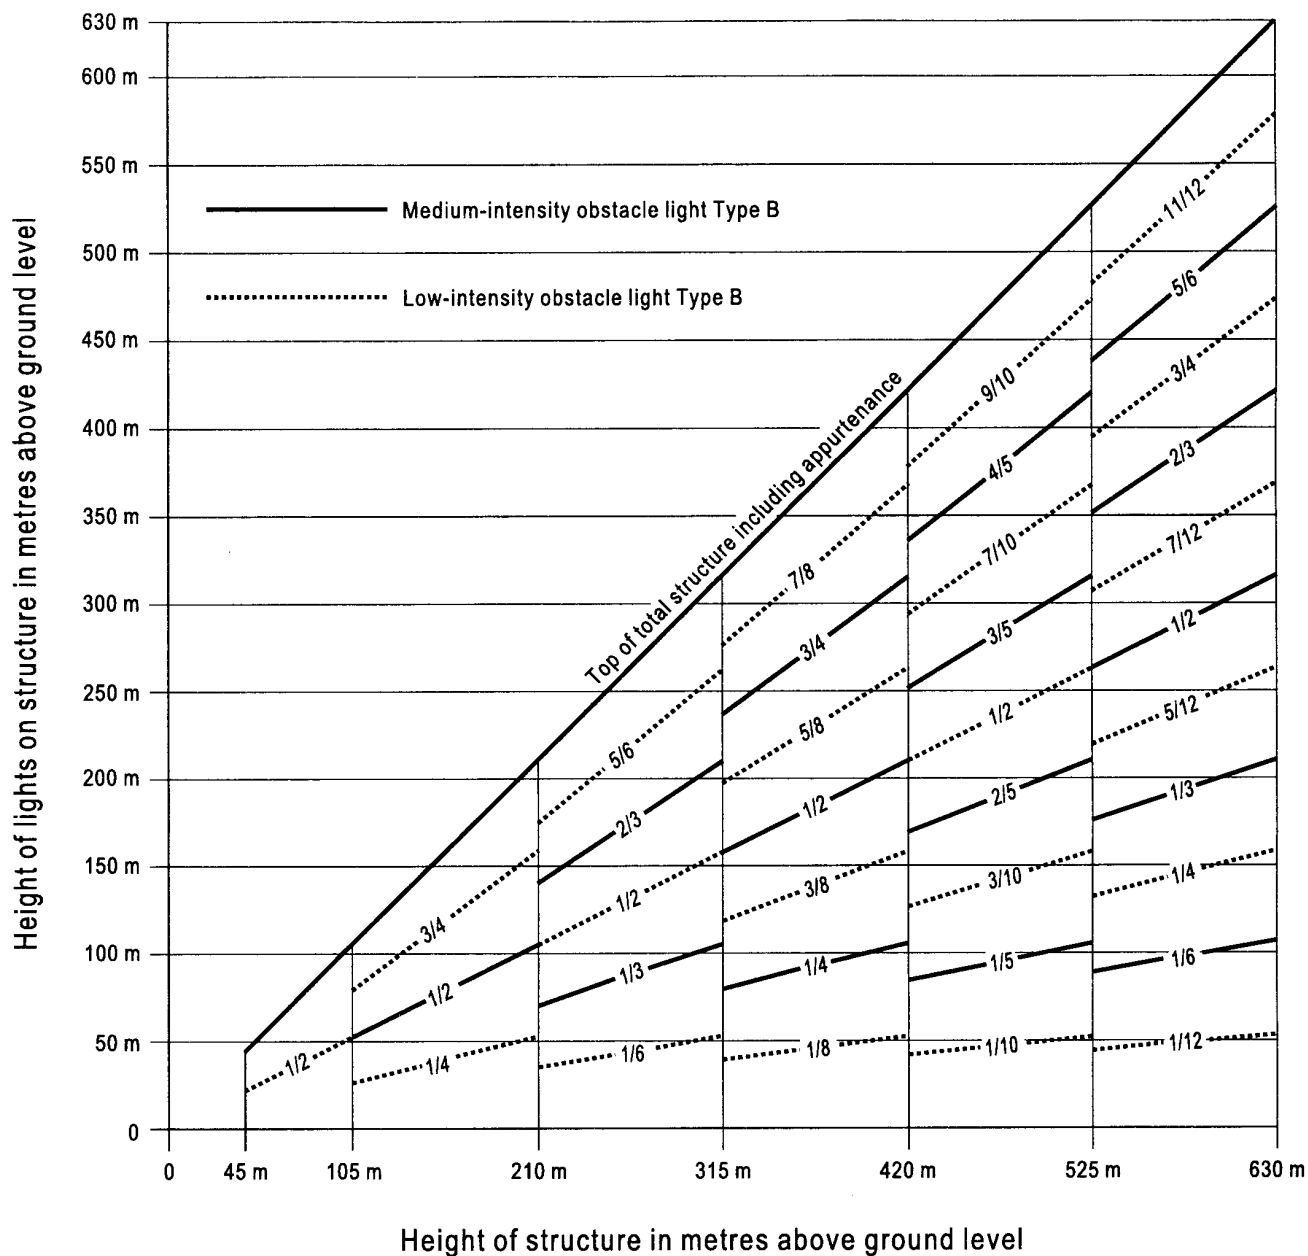

Note.— For night-time use only.

Figure 6.2 Medium-intensity flashing-red obstacle lighting system, Type B



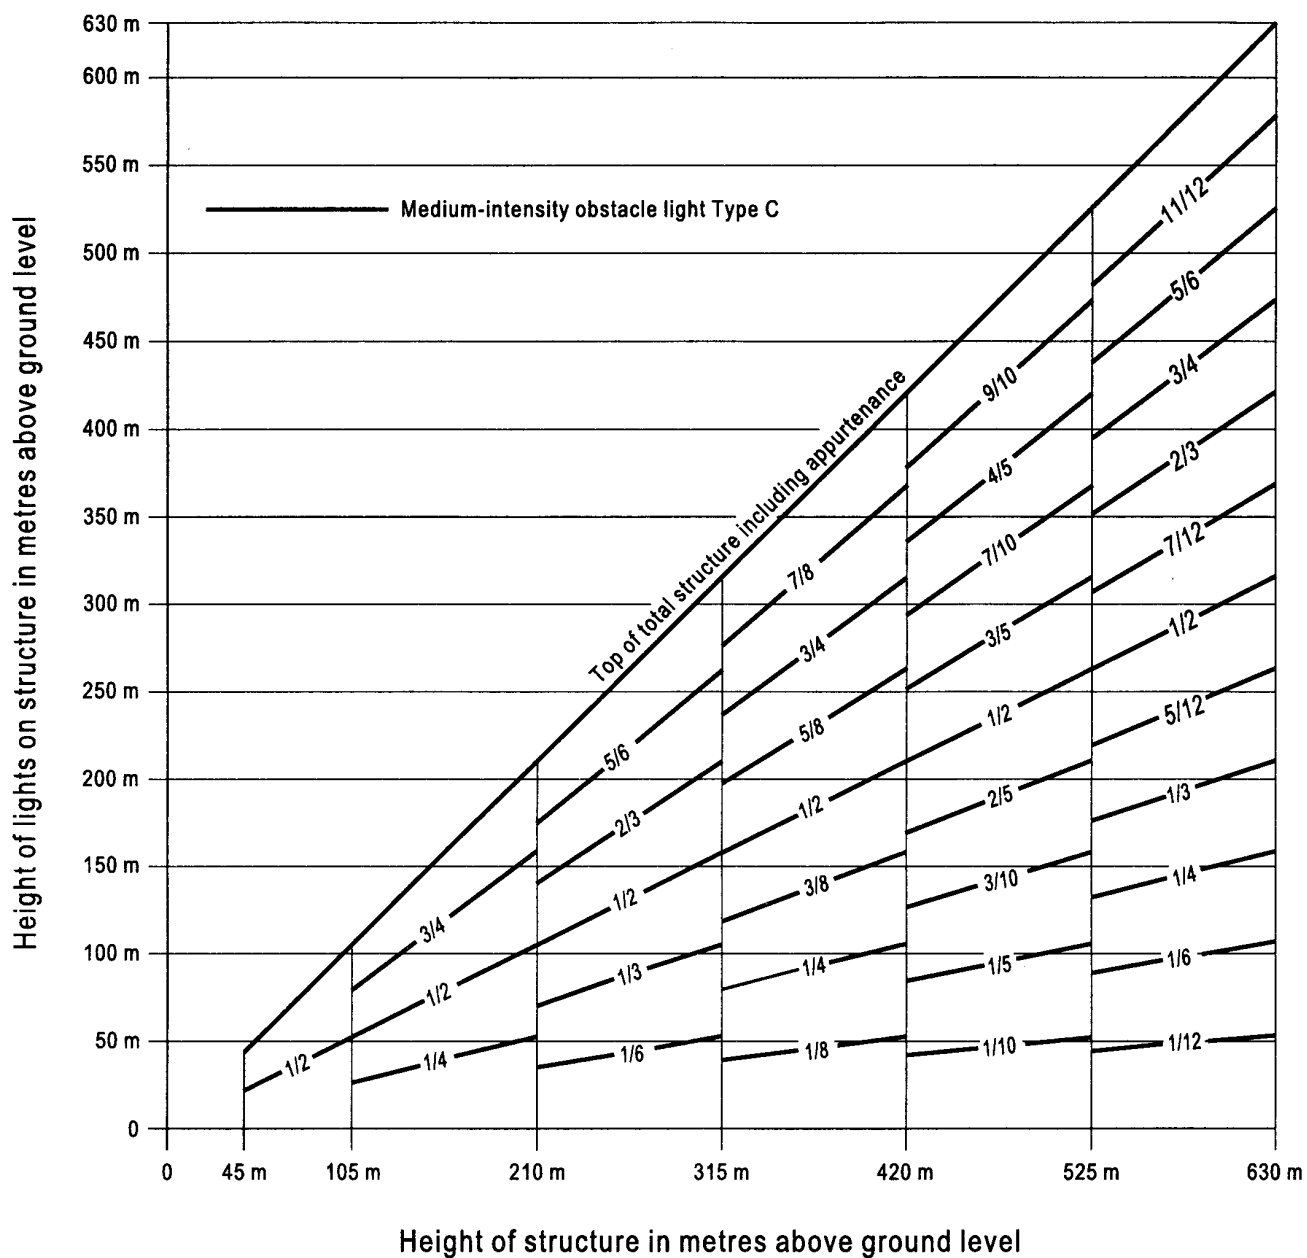


Figure 6.3 Medium-intensity fixed-red obstacle lighting system, Type C

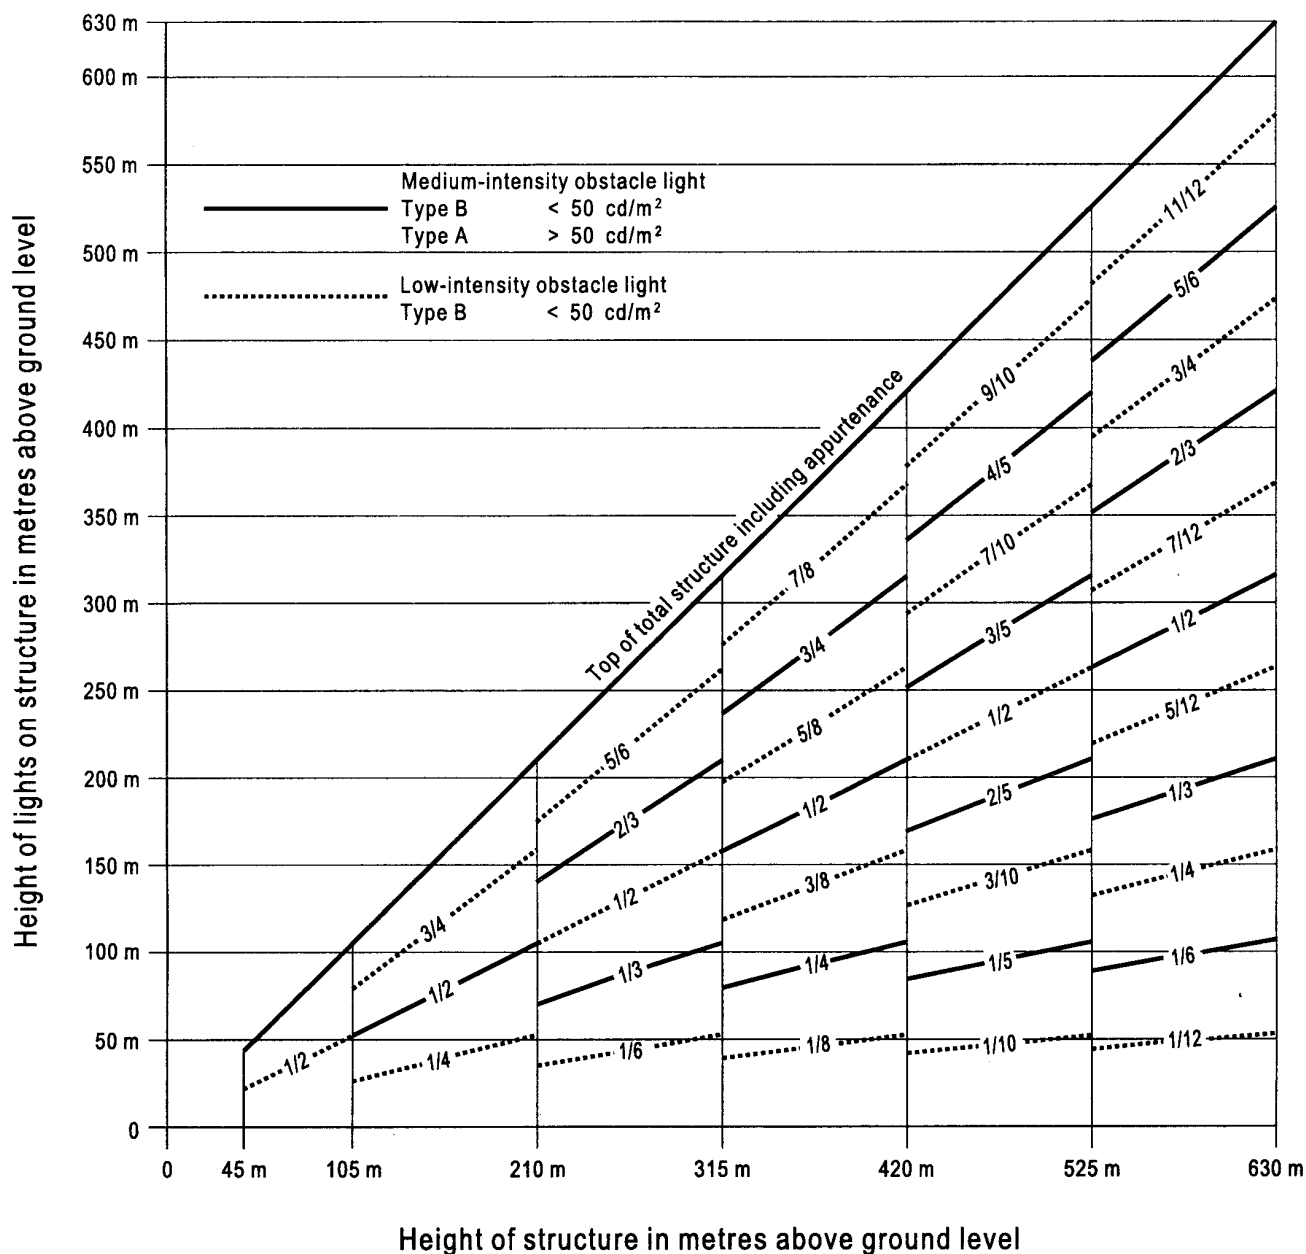

Note.— High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level.
If medium-intensity lighting is used, marking will also be required.

Figure 6.4 Medium-intensity dual obstacle lighting system, Type A/Type B

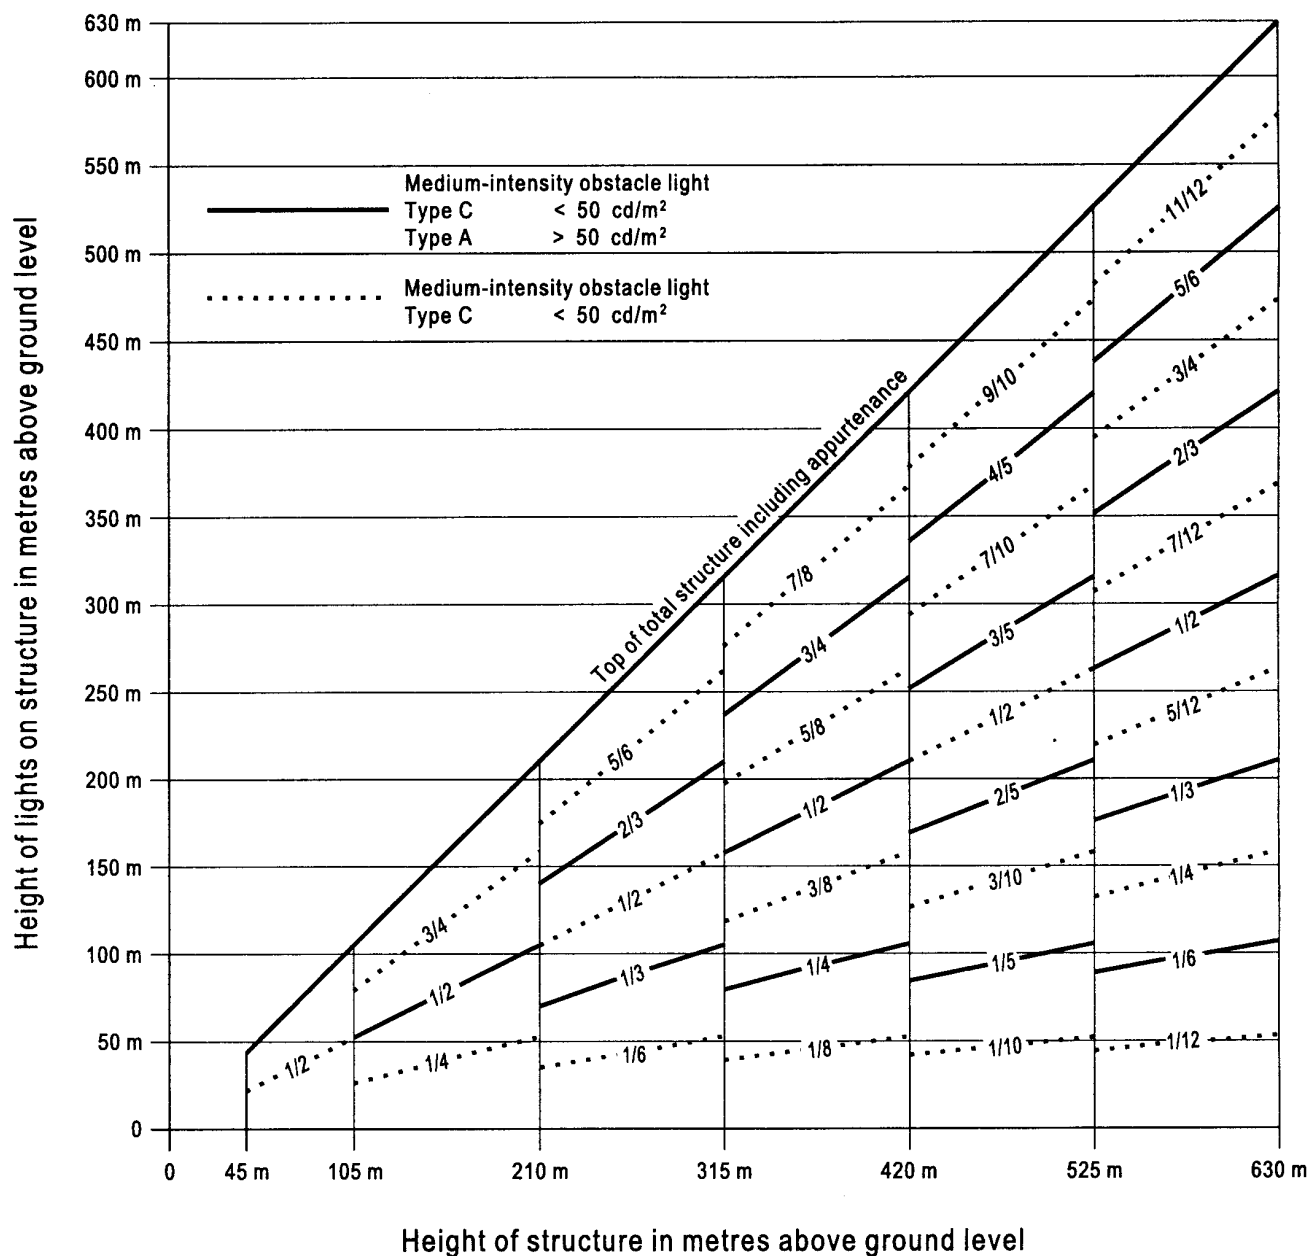

Note.— High-intensity obstacle lighting is recommended on structures with a height of more than 150 m above ground level. If medium-intensity lighting is used, marking will also be required.

Figure 6.5 Medium-intensity dual obstacle lighting system, Type A/Type C

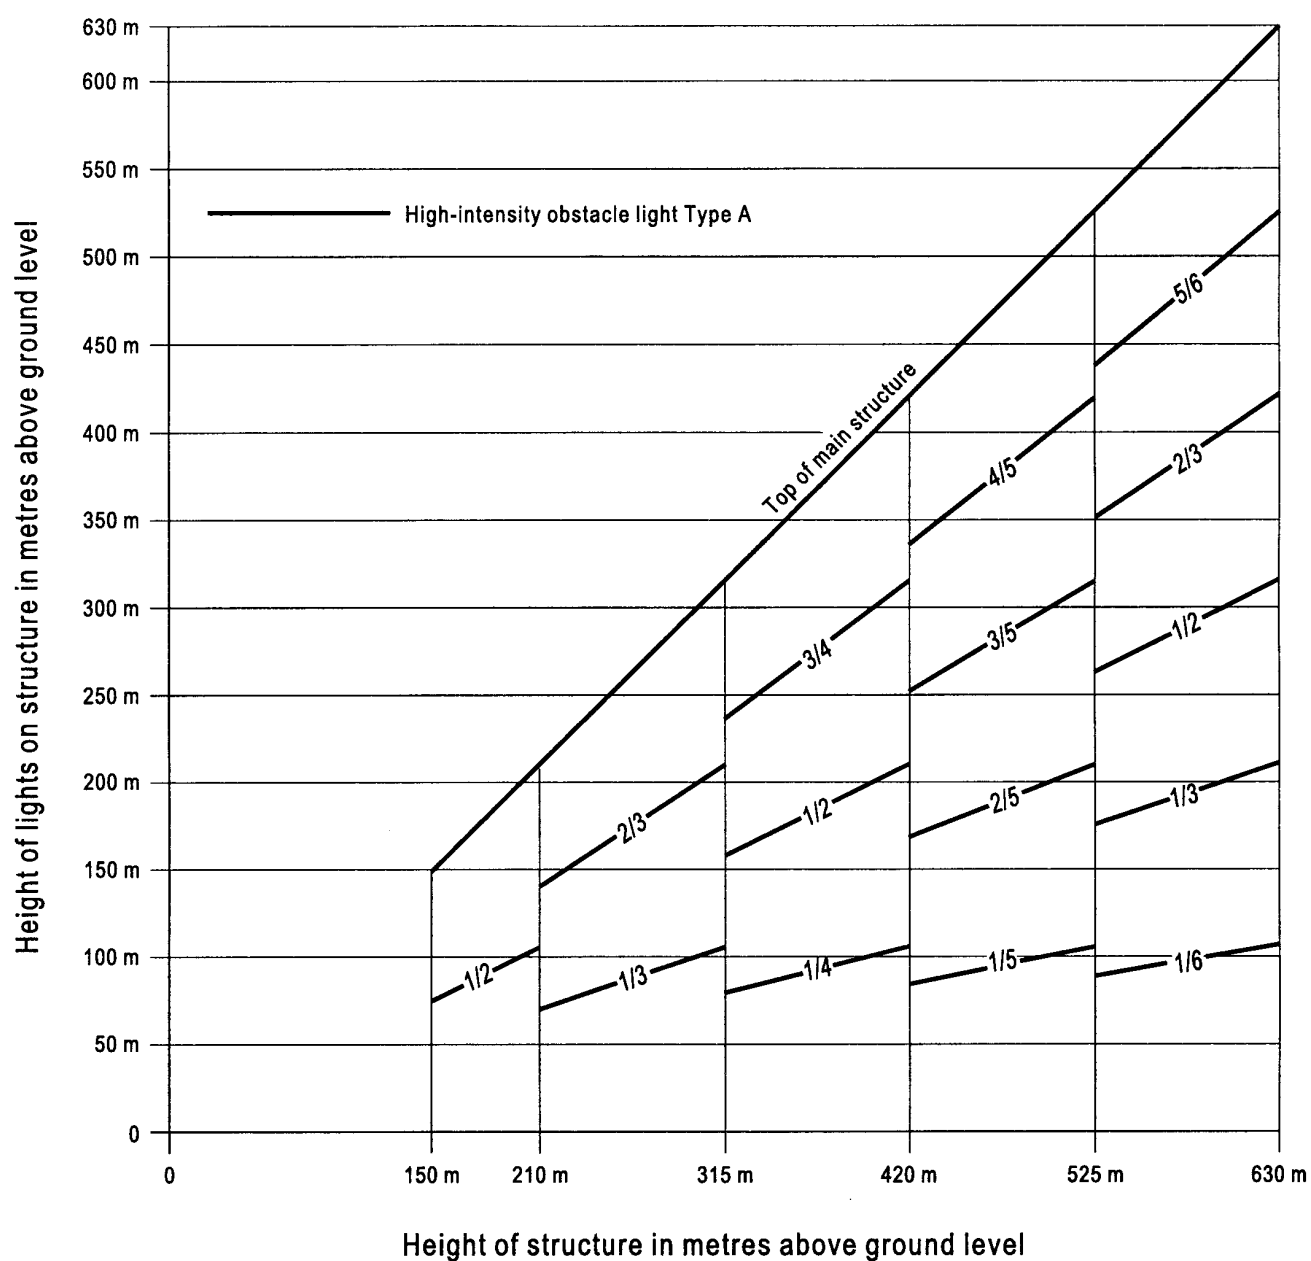


Figure 6.6 High-intensity flashing-white obstacle lighting system, Type A

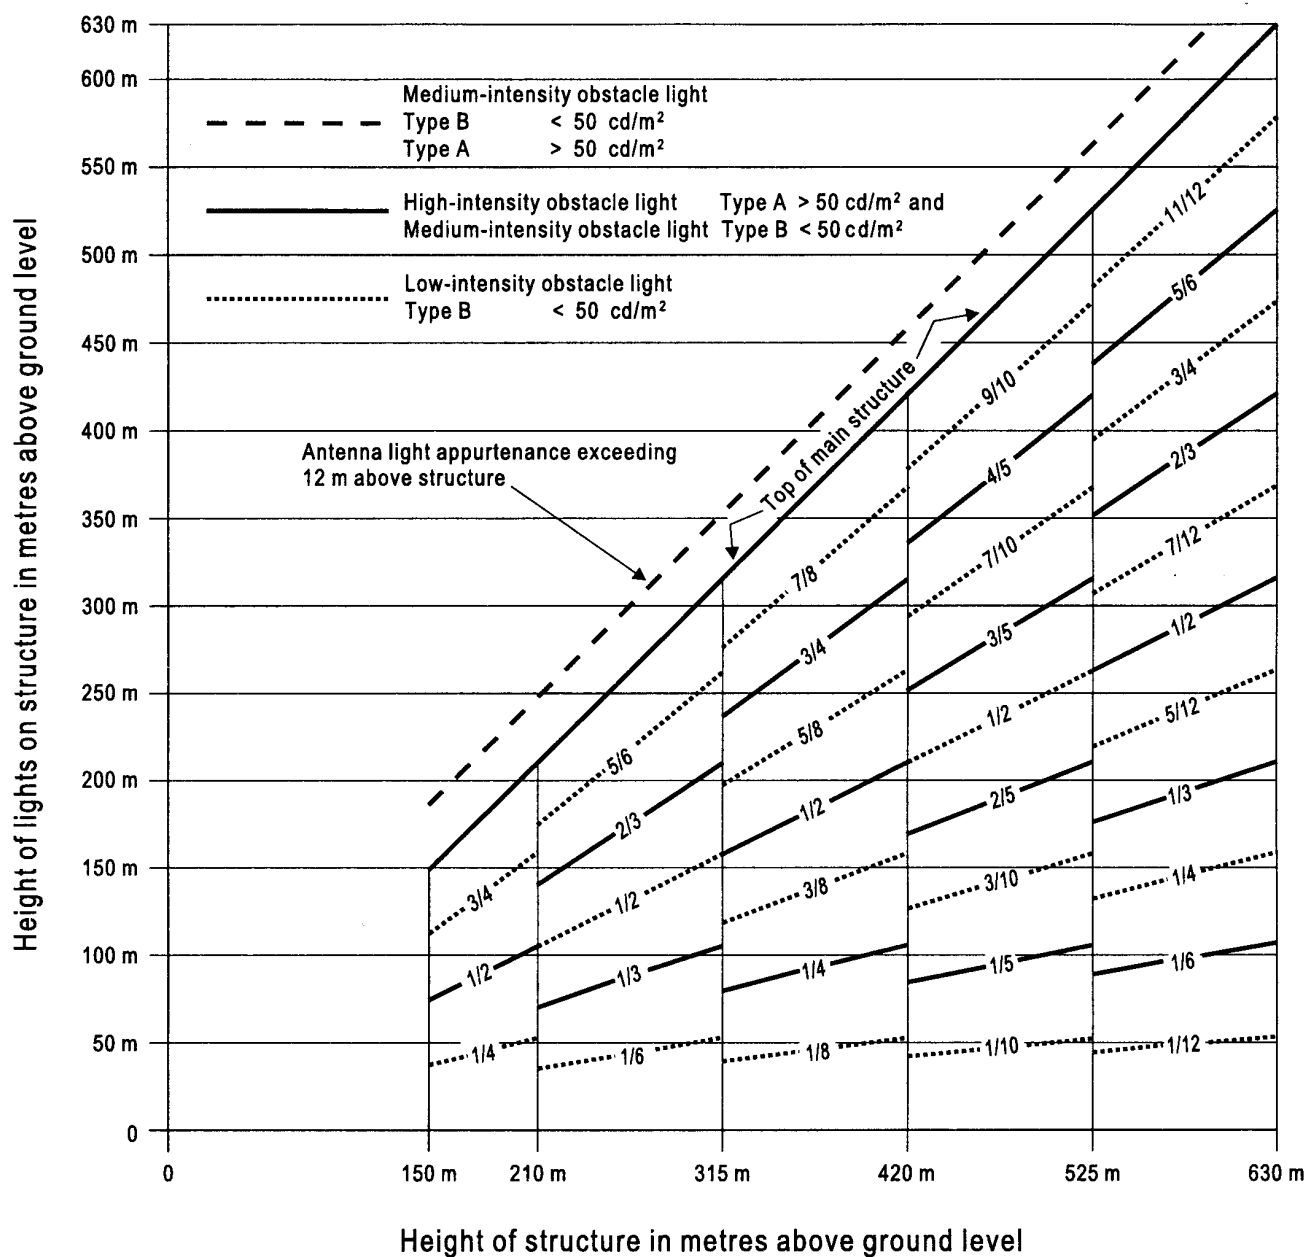


Figure 6.7 High-/medium-intensity dual obstacle lighting system, Type A/Type B

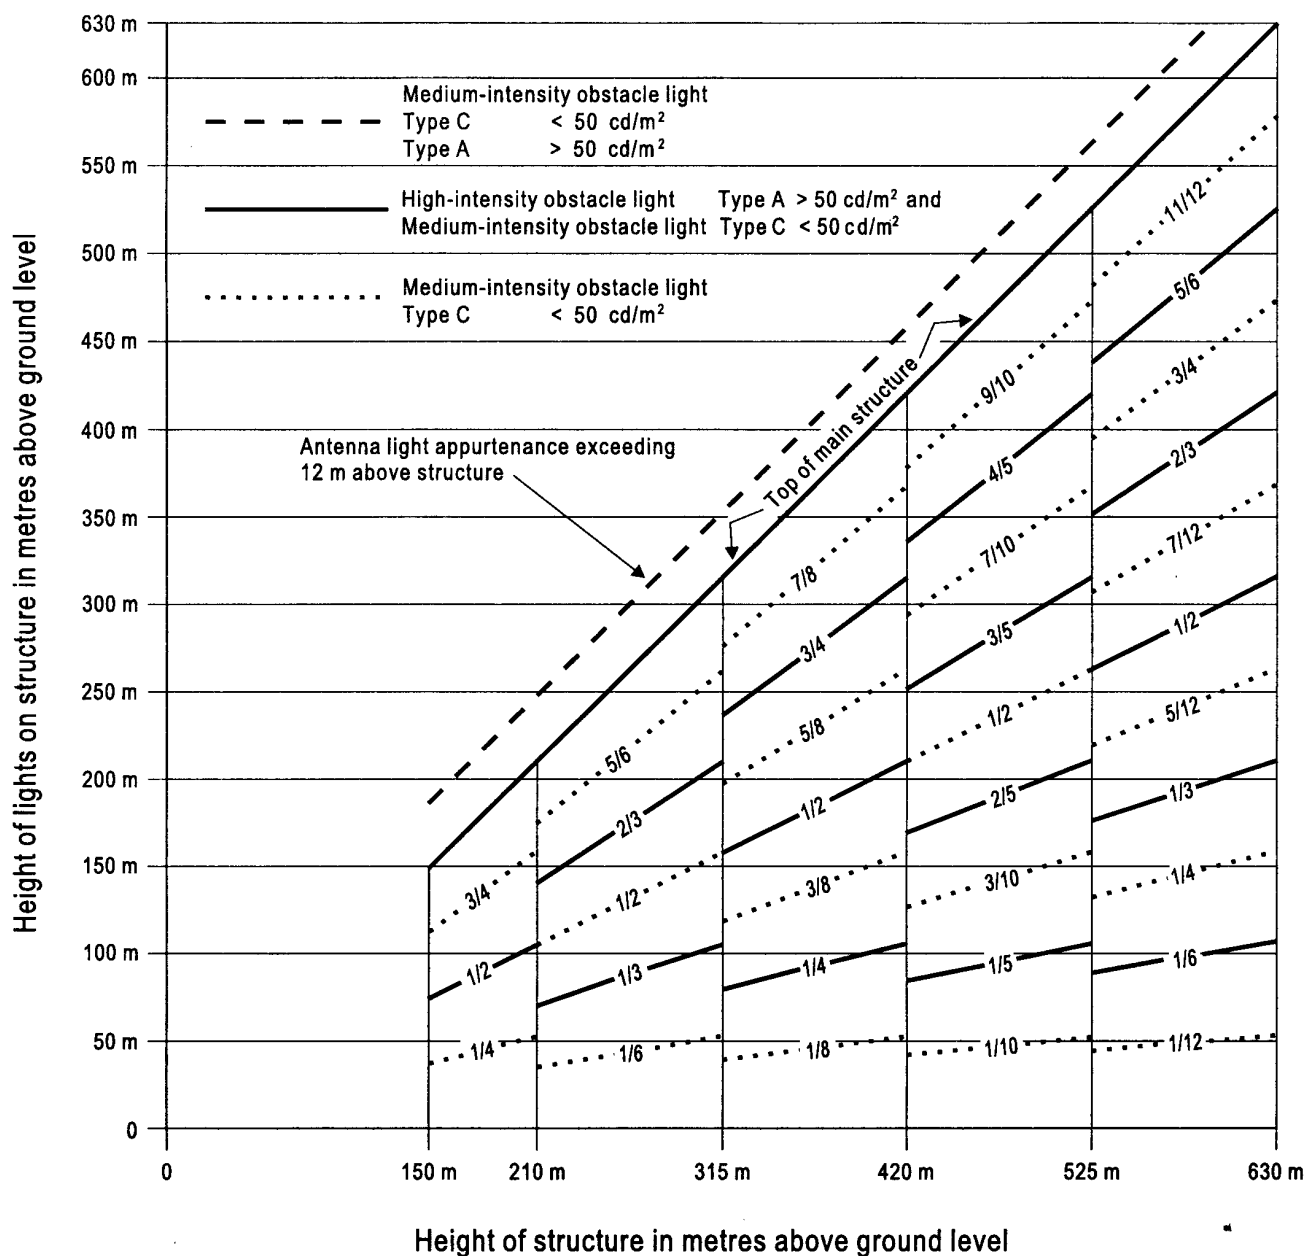


Figure 6.8 High-/medium-intensity dual obstacle lighting system, Type A/Type C